

DUMMY LOADS AND ATTENUATORS


ATTENUATORS

100 W
0-2 GHz



DESCRIPTION:

- ★ This 100 W series include 3 dB, 10 dB, 20 dB and 30 dB attenuators.
- ★ This series of attenuators have very low SWR and are especially suitable for use with:
 - Coaxial Transmission Lines.
 - Power Monitors.
 - Wattmeters.
- ★ The attenuators have a finish of black anodization.
- ★ Case temperature must be held to 100° C maximum.

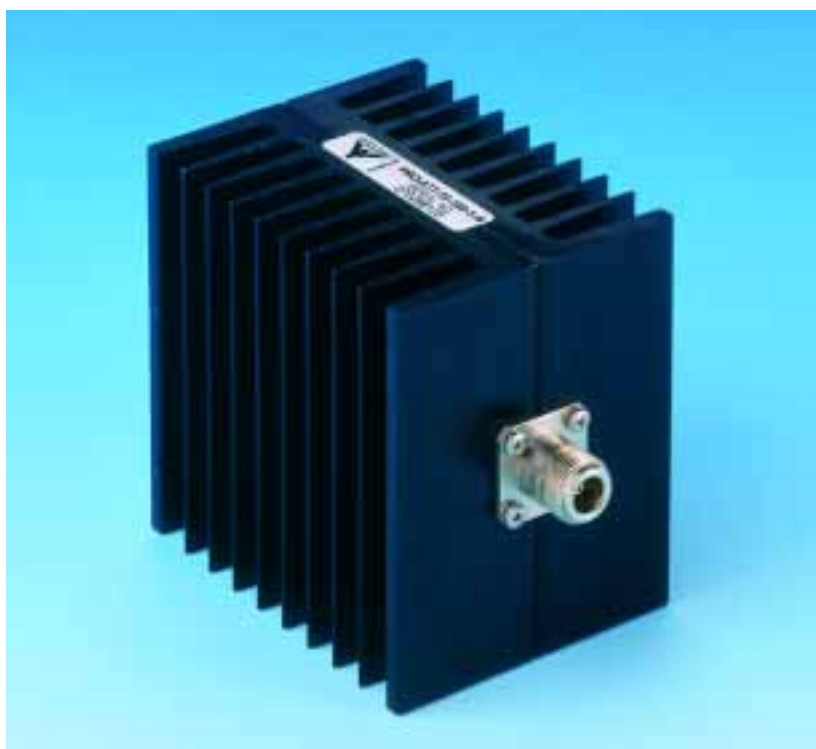

SPECIFICATIONS:

ELECTRICAL		
	PRO-ATT-...-100-2-N	PRO-ATT-...-100-2-N
FREQUENCY RANGE	0-1 GHz	1-2 GHz
MAX. INPUT POWER	50 W	50 W
ATTENUATION	3, 10, 20 or 30 dB	3, 10, 20 or 30 dB
VAR. on ATTENUATION	± 0.5 dB	± 1.5 dB
IMPEDANCE	Nom. 50 Ω	Nom. 50 Ω
SWR	≤ 1.25	≤ 1.5
MECHANICAL		
TEMP. RANGE	-30° C i +60° C	
CONNECTORS	N-female	
DIMENSIONS (W x H x L)	80 x 100 x 138 mm	
WEIGHT	Approx. 1110 g	