

# DUMMY LOADS AND ATTENUATORS


## ATTENUATORS

50 W  
0-2 GHz



### DESCRIPTION:

- ★ This 50 W series include 3 dB, 10 dB, 20 dB and 30 dB attenuators.
- ★ This series of attenuators have very low SWR and are especially suitable for use with:
  - Coaxial Transmission Lines.
  - Power Monitors.
  - Wattmeters.
- ★ The attenuators have a finish of black anodization.
- ★ Case temperature must be held to 100° C maximum.

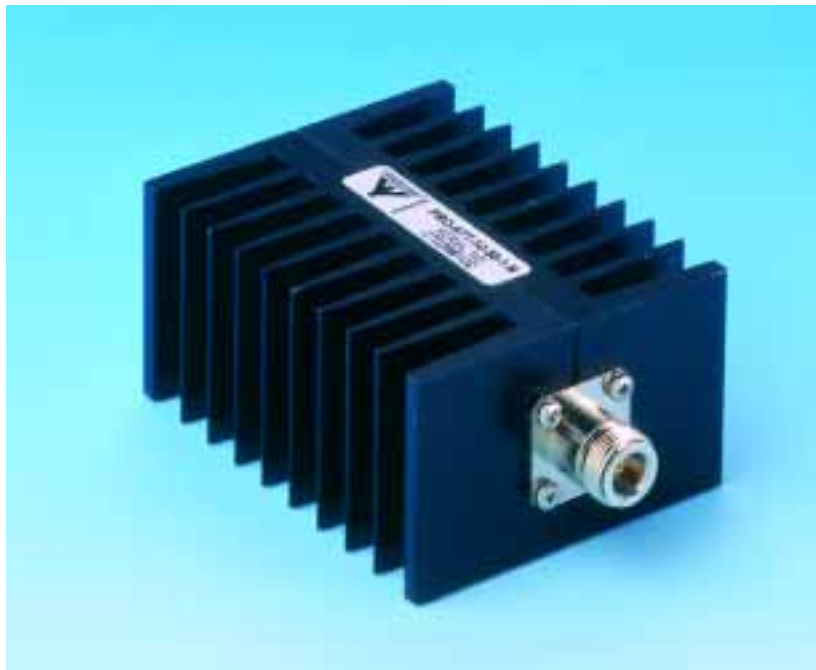

### SPECIFICATIONS:

	ELECTRICAL	
	PRO-ATT-...-50-2-N	PRO-ATT-...-50-2-N
FREQUENCY RANGE	0-1 GHz	1-2 GHz
MAX. INPUT POWER	50 W	50 W
ATTENUATION	3, 10, 20 or 30 dB	3, 10, 20 or 30 dB
VAR. on ATTENUATION	± 0.5 dB	± 1.5 dB
IMPEDANCE	Nom. 50 Ω	Nom. 50 Ω
SWR	≤ 1.25	≤ 1.5
MECHANICAL		
TEMP. RANGE	-30° C   +60° C	
CONNECTORS	N-female	
DIMENSIONS (W x H x L)	50 x 80 x 138 mm	
WEIGHT	Approx. 557 g	

PROCOM A/S reserve the right to amend specifications without prior notice.