

DUPLEXERS, DIPLEXERS AND POWER SPLITTERS

DPF 4/...-125

Duplex Filters for the 85 MHz Band



DESCRIPTION:

- ★ High power base station duplex filters for the 66–88 MHz range.
- ★ The use of large $\varnothing 125$ mm cavities means a high Q, resulting in a very small duplex spacing.
- ★ The large dimensions also mean a high power rating.
- ★ High frequency stability on temperature and power.
- ★ Mounting brackets for 19" mounting incl.
- ★ Please specify the frequencies for TX and RX when ordering.



DPF 4/33-125

SPECIFICATIONS:

	ELECTRICAL	
	DPF 4/22-125	DPF 4/33-125
FREQUENCY RANGE	66–88 MHz	66–88 MHz
MAX. INPUT POWER	250 W @ 1 dB IL	250 W @ 1.5 dB IL
MIN. DUPLEX SPACING	250 kHz	250 kHz
TYP. INSERTION LOSS	< 1.0 dB	< 1.5 dB
ATTENUATION	> 40 dB	> 60 dB
IMPEDANCE	Nom. 50 Ω	Nom. 50 Ω
SWR	≤ 1.5	≤ 1.5
MECHANICAL		
TEMP. RANGE	-30° C i +60° C	-30° C i +60° C
FREQ. STABILITY	Approx. 0.8 ppm/° C	Approx. 0.8 ppm/° C
CONNECTORS	N-female	N-female
DIMENSIONS (D x W x H)	260 x 483 x 1400 (1500) mm	260 x 483 x 1400 (1500) mm
WEIGHT	Approx. 19 kg	Approx. 28.4 kg


PROCOM A/S reserve the right to amend specifications without prior notice.

DUPLEXERS, DIPLEXERS AND POWER SPLITTERS

DPF 4/...-125 Duplex Filters for the 85 MHz Band



TYPICAL RESPONSE CURVES @ 1 MHz DUPLEX SPACING:

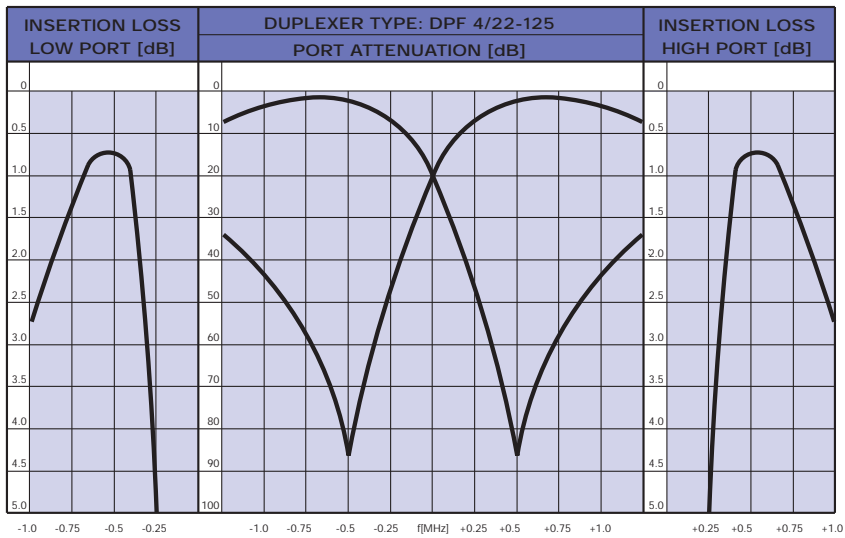

TYPICAL RESPONSE CURVES @ 1 MHz DUPLEX SPACING:

