

FSP 70 1/4/...-ICOM 1/4"-32
"StraightFlex" Antenna with
ICOM 1/4"-32 UNEF-2A Connector
for Portable Equipment in the 70 cm Band

PROCOM



TETRA

DESCRIPTION:


- ★ Highly flexible, polyethylene covered with StraightFlex steel wire.
- ★ Full-size 1/4 λ whip.
- ★ Highest quality materials in an elegant design.
- ★ Delivered factory tuned and tested to ensure minimum SWR.
- ★ Provided with ICOM 1/4"-32 UNEF-2A connector.

ORDERING DESIGNATIONS:

FREQUENCY	380-430 MHz	400-450 MHz	420-470 MHz
TYPE NO.	FSP 70 1/4/s-ICOM 1/4"-32	FSP 70 1/4/l-ICOM 1/4"-32	FSP 70 1/4/h-ICOM 1/4"-32

SPECIFICATIONS:

ELECTRICAL	
MODEL	FSP 70 1/4/...-ICOM 1/4"-32
ANTENNA TYPE	1/4 λ antenna for portable equipment
FREQUENCY	70 m band covered by three models
IMPEDANCE	Nom. 50 Ω
POLARISATION	Vertical
GAIN	0 dB (compared to a 1/4 λ portable antenna on the same equipment)
BANDWIDTH	≥ 50 MHz @ SWR ≤ 2.0
SWR	< 2 when mounted directly on portable equipment
MAX. POWER	100 watt
MECHANICAL	
MATERIALS	Polyethylene covered flexible steel wire Black-chromed brass
COLOUR	Black
TOTAL HEIGHT	Approx. 170 mm (dep. on type)
WEIGHT	Approx. 24 g
CONNECTOR	ICOM 1/4"-32 UNEF-2A

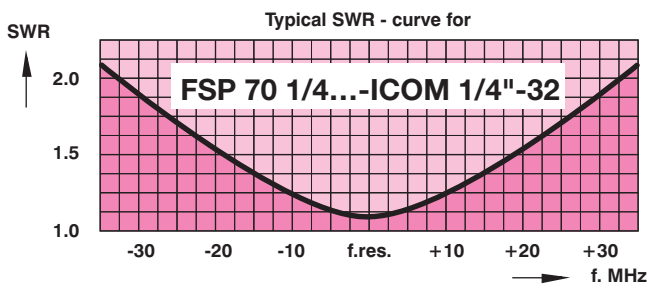

PROCOM A/S reserve the right to amend specifications without prior notice.